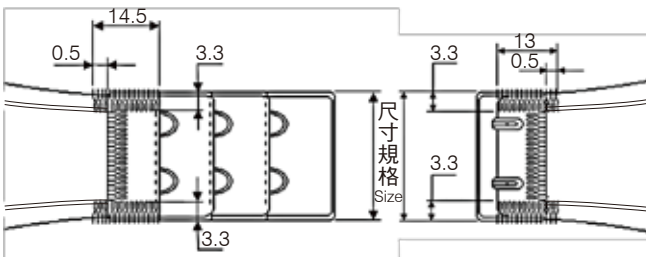



產品規格 | SPECIFICATION

型號 Model	ASP-UBB100R (鉤釦) / ASP-UBB100L (環釦) HOOK / BUCKLE																				
搭配縫紉機機頭 Collocation Machine Head	JUKI LK-1920 高速電子打結機 JUKI LK-1920 High speed electronic bartacking machine																				
車縫速度 Sewing Speed	最高 Max 2000 SPM																				
使用針型 Needle Type	DP×17 #14																				
控制系統 Control System	使用順序器控制 Programmable sequencer																				
標準附件 Standard Accessories	固定桿(壓腳用) 下送盤 壓布片 壓腳 固定塊(壓布片用)	Fixed rod for presser foot Down-feed holder Presser piece Presser foot Fixed block (cloth pressing)	固定桿(壓腳用) 固定座 下送盤 導布片*2 壓腳 壓布片	Fixed rod for presser foot Fixed mount Down-feed holder Guide plate *2 Presser foot Presser piece																	
可縫製背帶規格 Stitch Length	<div></div> <div>背帶切斷寬度 Strap cuttable width : 19、31、38、57、77 (mm)</div> <table><tr><td>選項 Options</td><td>尺寸規格(mm) Size (mm)</td><td>縫製寬度(mm) Sewing width(mm)</td></tr><tr><td>A</td><td>19</td><td>18~20</td></tr><tr><td>B</td><td>31</td><td>30~32</td></tr><tr><td>C</td><td>38</td><td>37~39</td></tr><tr><td>D</td><td>57</td><td>56~58</td></tr><tr><td>E</td><td>77</td><td>76~78</td></tr></table>			選項 Options	尺寸規格(mm) Size (mm)	縫製寬度(mm) Sewing width(mm)	A	19	18~20	B	31	30~32	C	38	37~39	D	57	56~58	E	77	76~78
選項 Options	尺寸規格(mm) Size (mm)	縫製寬度(mm) Sewing width(mm)																			
A	19	18~20																			
B	31	30~32																			
C	38	37~39																			
D	57	56~58																			
E	77	76~78																			
氣體消耗量 Air Consumption	< 2L / min (進行7次縫紉作業) < 2L / min (Process sewing 7 times)																				
氣壓 Air Pressure	0.5 Mpa																				
電源電壓 Voltage	單相 AC200~240V 50/60Hz Single Phase AC200~240V 50/60Hz																				
機器尺寸(mm) Dimension (mm)	寬1200× 深700× 高1315mm (含桌板、線架) (W)1200×(D)700×(H)1315mm (With table and thread stand)																				
生產效率 Production Capacity	7 sec / 一縫紉作業 (※布帶寬度為 19 mm 時) 7 sec / operation (※When strap size 19 mm)																				

實體車縫圖形
Sewing pattern

ASP-UBB100R ASP-UBB100L

底盤上起縫原點
Stitch begin point




※ 欲更換縫紉樣式，需使用『 JUKI PM-1 』裝置

※ JUKI PM-1 device needs to be installed if operator wanted to change sewing pattern.

※ 欲加購選項 A, B, D, E 者，請於下單時註明選項 (選項 C 為標準配備)

※ Please specify in order when additionally purchasing option A, B, D or E
(Standard complimentary: option C)

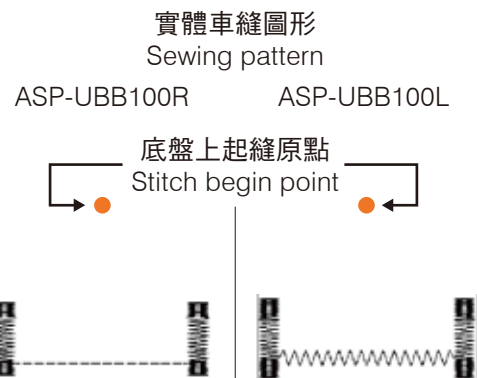

高林股份有限公司
KAULIN MFG. CO., LTD.

由於對產品的改良及更新，本產品型錄之產品規格及外觀的修改恕不事先通知！

The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.



ISO 9001:2000
ISO 14001:2004

ASP-UBB100R/L



品質提高

Excellent Quality



產量加倍

Multiplied Output



成本銳減

Reasonable Cost

ASP-UBB100R/L

Automatic Under Bra Buckle Sewing Machine

自動內衣背釦車縫機